


Technical data

ROTISSERIE "PERFORMANCE" RANGE RE.: 1325NA6G GAS COOKING IN "CONTINUOUS AND ALTERNATIVE ROTATION"

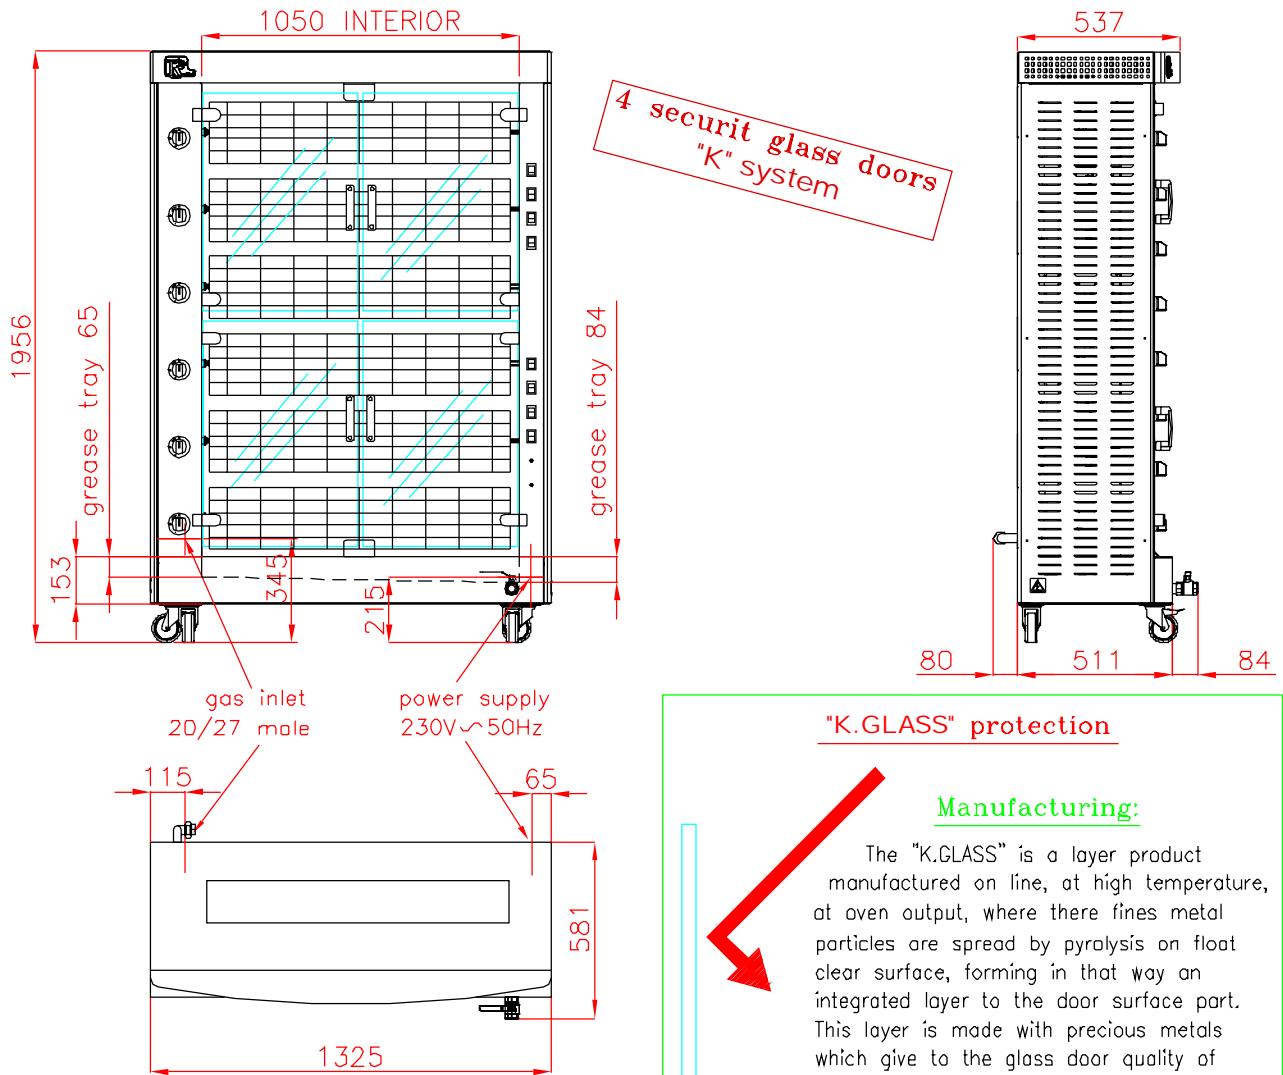

CHARACTERISTICS

Weight : 210 kgs

Capacity 30/36 poultry, or 24/30 "CRAPAUDINE", 6 adjustable spits

Stainless steel AISI 430 with thickness 15/10 (for use in food preparation)

Table with integrated grease tray (2% slope) with a drain valve

Upper front and top banner cover in black enamel.

4 casters \varnothing 110mm of which 2 with brakes

Power supply: 230V~50Hz, Length of the cable 2 meters

Electrical power 0,4 kW made up of:

_6 motors of 50 W nominal with output drive shaft of all-metal gears \varnothing 12 mm.

_1 halogen lamp of 100 W

Radiant type burner, **Puissance gaz: 33 kW**

Nat gas consumption.: 3,54 m³/hr, propane gas: 2,52 kg/h.

OPTIONS: specific color ref.: COLOR, enamel decorative band ref.: BAN,
flexible gas connection

ACCESSORIES : spits, prongs, spit removers ref.:DEC, torch lighter ref.:AT

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.